

AMENDMENTS TO THE CLAIMS:

This listing of claims will replace all prior versions, and listings, of claims in the application:

LISTING OF CLAIMS:

1. (Cancelled).




2. (Cancelled).

3. (Cancelled).

4. (Cancelled).

5. (Cancelled).

6. (Currently Amended) A thin film transistor device comprised of a substrate, a gate electrode, a gate dielectric layer, a source electrode and a drain electrode, and a semiconductor layer comprised of a polythiophene derived from a monomer segment or monomer segments containing two 2,5-thienylene segments, (I) and (II), and an optional divalent linkage D



wherein A is a side chain with at least about 5 carbon atoms; B is hydrogen or a side chain with from about 1 to about 4 carbon atoms; and D is a divalent linkage, and wherein the number of A-substituted thienylene units (I) in the monomer segments is from about 1 to about 10, the number of B-substituted thienylene units (II) is from 0 to about 5, and the number of divalent linkages D is 0 or 1, and wherein said polythiophene has a M_n of from about 2,000 to about 100,000.

7. (Currently Amended) A thin film transistor device in accordance with **claim 6** wherein A is alkyl containing from about 5 carbon atoms to about 25 carbon atoms; B is hydrogen or a short chain alkyl containing from about 1 to about 4 carbon atoms; and D, when present, is arylene or dioxyarene, each containing from about 6 to about 40 carbon atoms, or alkylene or dioxyalkane, each containing from about 1 to about 20 carbon atoms, and wherein said source electrode and said gate dielectric layer are in contact with said semiconductive layer.

8. (Original) A thin film transistor device in accordance with **claim 6** wherein A is alkyl containing from about 6 to about 15 carbon atoms; B is hydrogen; and D is arylene containing from about 6 to about 30 carbon atoms, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

9. (Original) A thin film transistor device in accordance with **claim 6** wherein D is phenylene, tolylene, xylylene, biphenylene, substituted biphenylene, phenanthrenylene, dihydrophenanthrenylene, fluorenylene, dibenzothiophenediyl, dibenzofurandiyl, carbazolediyl, methylene, polymethylene, dialkylmethylene, dioxyalkane, dioxyarene, or oligoethylene oxide, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

10. (Original) A thin film transistor device in accordance with **claim 6** wherein A is hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, or pentadecyl; B is hydrogen; and D is phenylene, tolylene, xylylene, biphenylene, substituted biphenylene, phenanthrenylene, dihydrophenanthrenylene, fluorenylene, dibenzothiophenediyl, dibenzofuran-diyl, carbazolediyl, methylene, polymethylene, dialkylmethylene, dioxyalkane, or dioxyarene, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

11. (Original) A thin film transistor device in accordance with **claim 6** wherein said substrate is a plastic sheet of a polyester, a polycarbonate, or a polyimide, said gate, source, and drain electrodes are each independently comprised of gold, nickel, aluminum, platinum, indium titanium oxide, a conductive polymer, a conductive ink or paste comprising a dispersion of conductive particles in a dispersing medium, and said gate dielectric layer is comprised of silicon nitride, silicon oxide, insulating polymers of a polyester, a polycarbonate, a polyacrylate, a poly(methacrylate), a poly(vinyl phenol), a polystyrene, a polyimide, an epoxy resin, an inorganic-organic composite material of nanosized metal oxide particles dispersed in a polymer, a polyimide, or an epoxy resin; and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.


12. (Original) A thin film transistor device in accordance with **claim 6** wherein said substrate is glass or a plastic sheet; said gate, source and drain electrodes are each independently comprised of gold; said gate dielectric layer is comprised of an organic polymer of poly(methacrylate), polyacrylate, poly(vinyl phenol), polystyrene, polyimide, polycarbonate, or a polyester, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

13. (Original) A thin film transistor device in accordance with **claim 6** wherein said polythiophene layer is formed by a solution process of spin coating, stamp printing, screen printing, or jet printing, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

14. (Original) A thin film transistor device in accordance with **claim 6** wherein said gate, source and drain electrodes, dielectric, and semiconductor layers are formed from components deposited by solution processes of spin-coating, solution casting, stamp printing, screen printing, and jet printing, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

15. (Original) A thin film transistor device in accordance with **claim 6** wherein the substrate is a plastic sheet of a polyester or a polycarbonate, and the gate, source and drain electrodes are comprised of conductive polymers of polystyrene sulfonate-doped poly(3,4-ethylenedioxythiophene) or a conductive ink or paste of a colloidal dispersion of a metal of silver or gold in a binder, and the gate dielectric layer is an organic polymer or an inorganic oxide particle-polymer composite, and wherein said source/drain electrodes and said gate dielectric layer are in contact with said semiconductive layer.

16. (Currently Amended) A thin film transistor device comprised of a substrate, a gate electrode, a gate dielectric layer, a source electrode and a drain electrode, and in contact with the source/drain electrodes and the gate dielectric layer, a semiconductor layer comprised of a polythiophene represented by Formula (III)

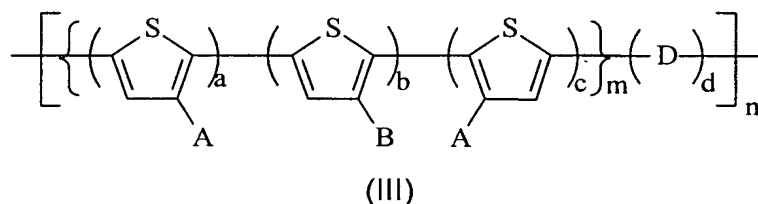

wherein A is a long side chain containing at least about 5 carbon atoms; B is hydrogen or a short side chain containing from about 1 to about 4 carbon atoms; and D is a divalent segment; a and c represent the number of A-substituted thienylenes, wherein a is at least 2; b is the number of B-substituted thienylene units and is from 1 to about 6; d is 0 or 1; and n is the degree of polymerization or the number of the monomer segments in the polythiophene, and wherein the polythiophene has an M_n between about 2,000 and about 100,000.

17. (Previously Presented) A thin film transistor device in accordance with **claim 6** wherein D is a divalent linkage optionally comprised of a saturated moiety of alkylene, -O-R-O-, -S-R-S-, -NH-R-NH-, where R is alkylene or arylene, or an unsaturated moiety of an arylene or heteroaromatics.

18. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is alkyl containing from 6 to about 25 carbon atoms; B is hydrogen or alkyl containing from 1 to about 3 carbon atoms; D is arylene or dioxyarene, each containing from about 6 to about 40 carbon atoms, or alkylene or dioxyalkane, each containing from about 1 to about 20 carbon atoms.

19. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is alkyl containing from about 8 to about 12 carbon atoms, and B is a hydrogen atom.

20. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is alkyl containing from 5 to about 15 carbon atoms; B is a hydrogen atom; D is arylene; a, b, c, and m are independently selected from the numbers 1, 2, and 3; and d = 1.

21. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is alkyl containing from about 8 to about 12 carbon atoms; B is a hydrogen atom; D is arylene; a = c = m = 1; b = 2; and d = 1.

22. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein n is from about 5 to about 5,000.

23. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein the number average molecular weight (M_n) of (III) is from about 2,000 to about 100,000, and wherein the weight average molecular weight (M_w) is from about 4,000 to about 500,000, each as measured by gel permeation chromatography using polystyrene standards.


24. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein the number average molecular weight (M_n) of (III) is from about 10,000 to about 30,000 and the weight average molecular weight (M_w) is from about 15,000 to about 100,000.

25. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, or pentyldecyl.


26. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein D is an arylene selected from the group consisting of phenylene, tolylene, xylylene, biphenylene, substituted biphenylene, fluorenylene, phenanthrenylene, dihydrophenanthrenylene, and dibenzofuranediyl, dibenzothiophenediyl, carbazole-diyl.

27. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein D is saturated linkage selected from the group consisting of alkylene, dioxyalkane, dioxyarene, and oligoethylene oxide.


28. (Original) A thin film transistor device in accordance with **claim 16** wherein said polythiophene (III) is selected from (1) through (17) wherein n represents the number of repeating segments

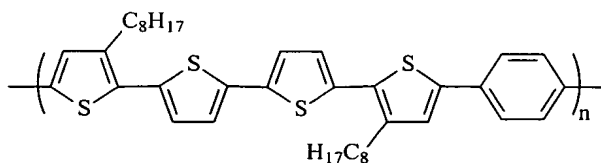


(1)

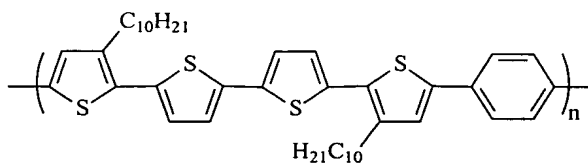


(2)

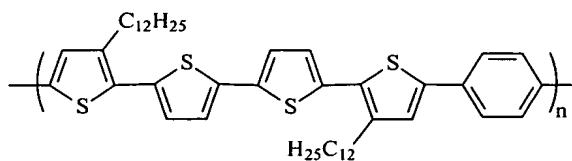


(3)

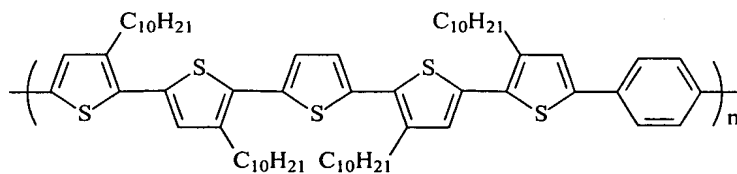


(4)



(5)

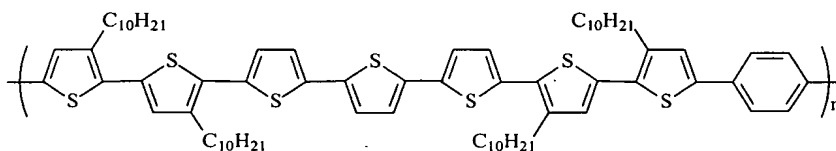


(6)

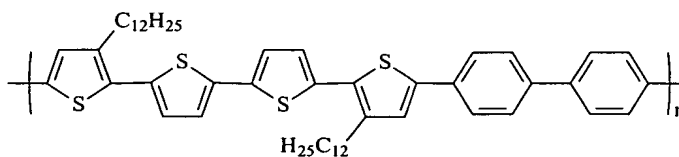


(7)


Cont
C1

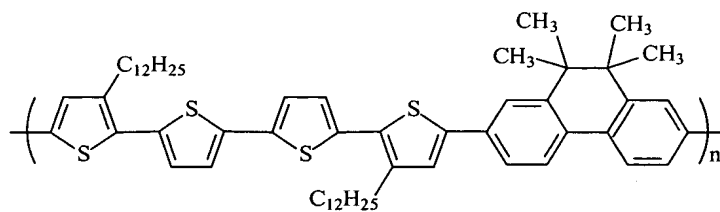


(8)

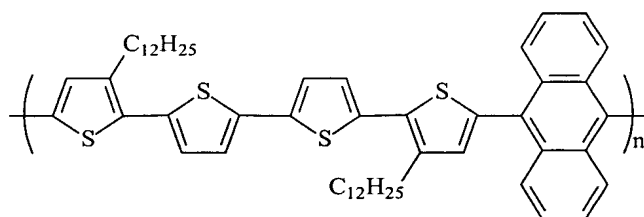


(9)

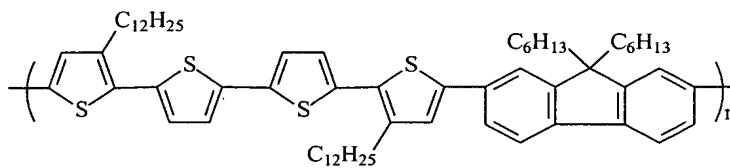

(10)

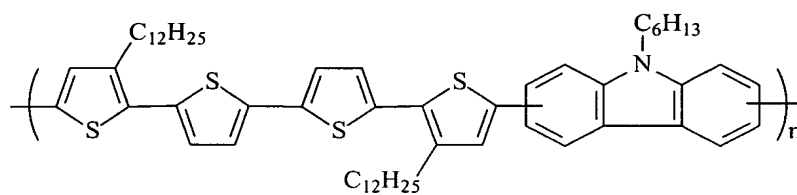


(11)

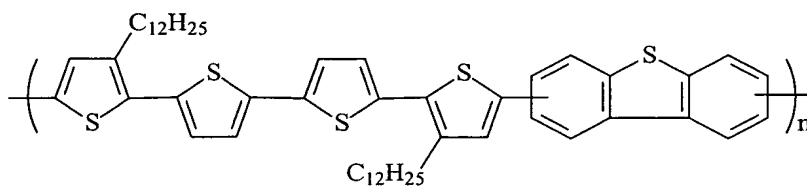


(12)


cont
C1

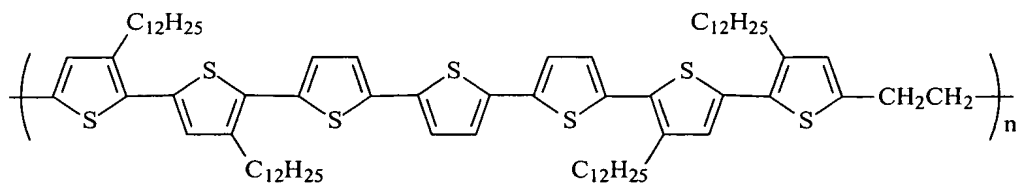


(13)

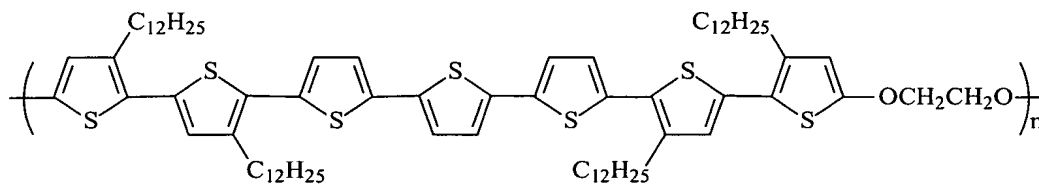


(14)

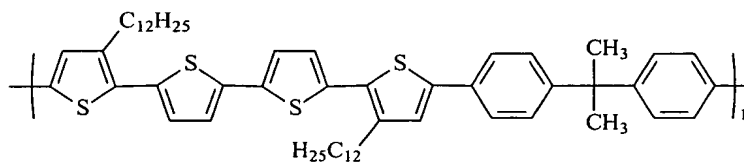

(15)

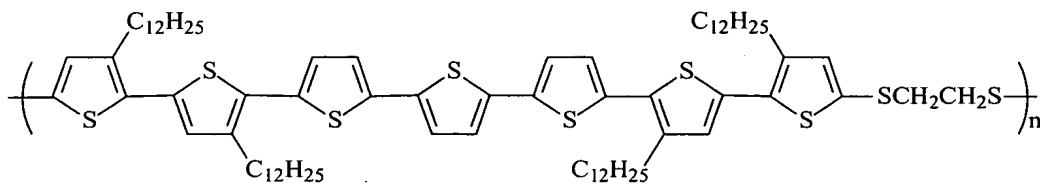


(16)

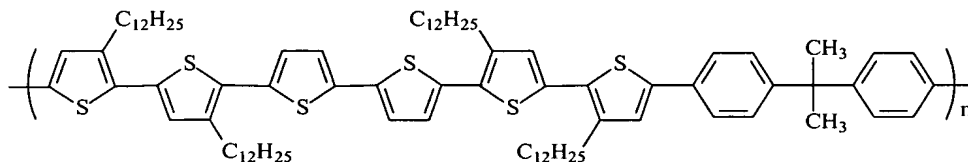


(17)

cont
01


29. (Original) A thin film transistor device in accordance with **claim 16** wherein polythiophene (III) is alternatively wherein n represents the number of segments

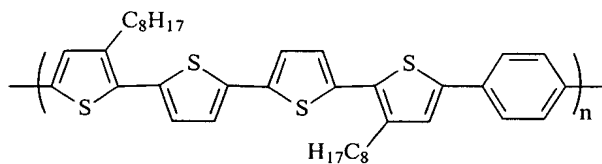


(1)

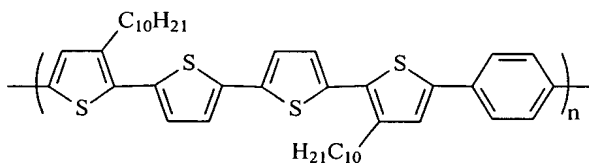


(2)

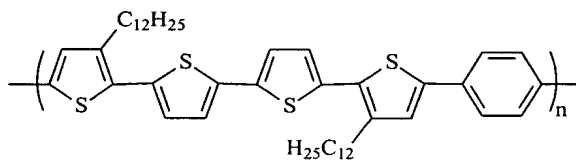

(3)

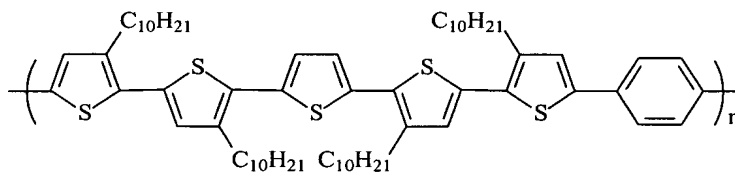


(4)

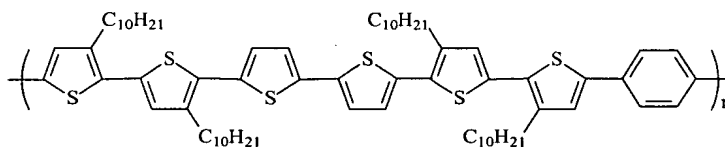


(5)


cont
C1

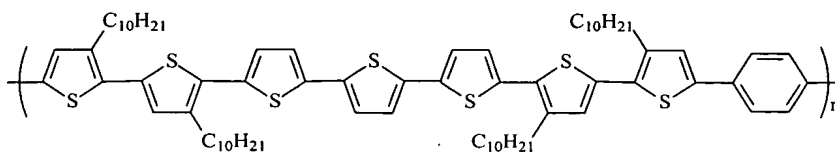

(6)

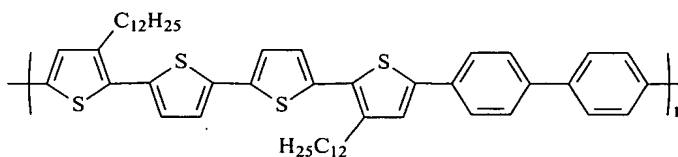


(7)

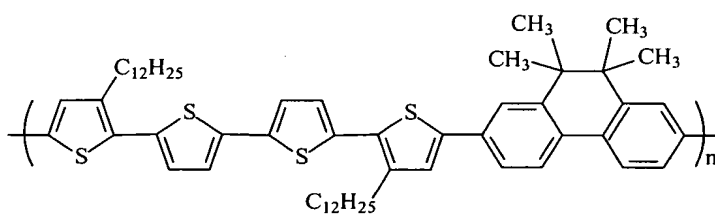


(8)


30. (Original) A thin film transistor device in accordance with **claim 16** wherein polythiophene (III) is alternatively wherein n represents the number of segments

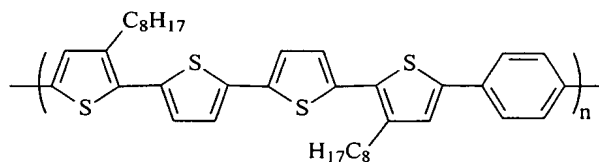


(1)

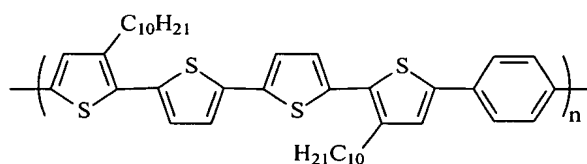


(2)

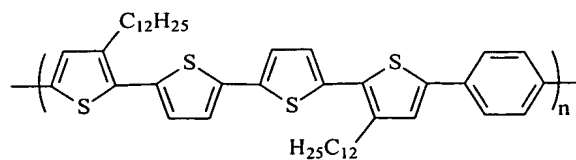

(3)

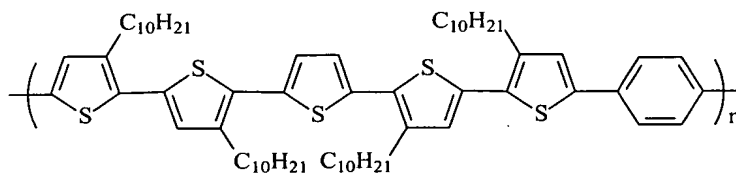


(4)

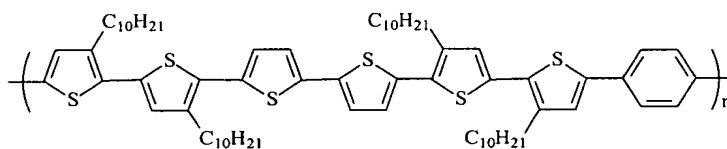


(5)


31. (Original) A thin film transistor device in accordance with **claim 16** wherein said polythiophene is alternatively

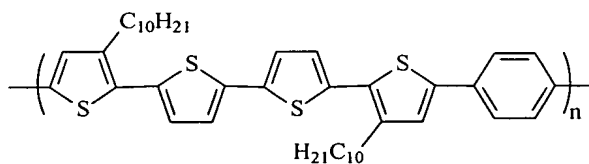

(2)

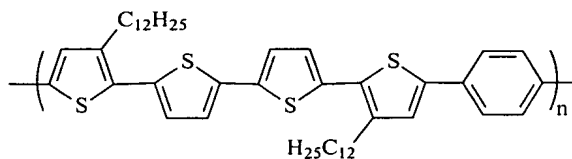

(3)

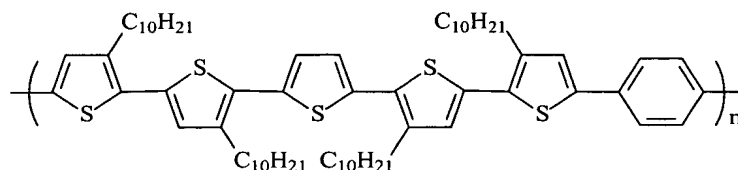

(4)

32. (Original) A thin film transistor device in accordance with **claim 16** wherein said substrate is a plastic sheet of a polyester, a polycarbonate, or a polyimide; said gate, source, and drain electrodes are each independently comprised of gold, nickel, aluminum, platinum, or indium titanium oxide; and said gate dielectric layer is comprised of silicon nitride, silicon oxide, insulating polymers of polyester, polycarbonates, polyacrylate, poly(methacrylate), poly(vinyl phenol), polystyrene, polyimide, or an epoxy resin.

33. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein said substrate is glass or a plastic sheet; said gate, source and drain electrodes are each independently comprised of gold or a metal dispersion in a binder; said gate dielectric layer is comprised of an organic polymer of polyester, polycarbonate, polyacrylate, poly(methacrylate), poly(vinyl phenol), polystyrene, polyimide, or an epoxy resin, or an inorganic-organic composite of nanosized metal oxide particles dispersed in a polymer of a polyester, a polyimide, or an epoxy resin.

34. (Original) A thin film transistor device in accordance with **claim 16** wherein the thickness of the substrate is from about 10 micrometers to about 10 millimeters; the thickness of the gate dielectric layer is from about 10 nanometers to about 1 micrometer; the thickness of the polythiophene semiconductor layer is from about 10 nanometers to about 1 micrometer; the thickness of the gate electrode layer is from about 10 nanometers to about 10 micrometers; and the thickness of the source or drain electrode is from about 40 nanometers to about 1 micrometer.

35. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is alkoxyalkyl, a polyether chain, perhaloalkyl, a polysiloxy chain, and hydrogen, halogen, alkyl, or alkoxy.

36. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein B is hydrogen, halogen, alkyl, or alkoxy.

37. (Currently Amended) A thin film transistor device in accordance with ~~claim 17~~ **claim 16** wherein A is methoxybutyl, methoxyhexyl, methoxyheptyl, polyethylene oxide, perfluoroalkyl, trialkylsiloxyalkyl, and B is a halide, methoxy, ethoxy, propoxy, or butoxy.

Contd
C1